


LIGHTPLANE 70 SM MP

Project

Name:

Type:



Meet the Lightplane 70 MP, engineered and made in Australia for maximum versatility and efficiency, the LPL70 MP comes with a frosted micro-prismatic diffuser that provides a homogenous and dot-free lighting solution whilst improving visual comfort. It features customizable lengths, angles, and shapes with a variety of diffuser choices, tailored for a dynamic industry. With an industry leading 131lm/W efficacy, it guarantees superior energy performance. The LPL70 is quick to install with the simple Zephyr-Link click lock gear tray for maintenance and future upgrades. Available finishes include white, black, or natural anodised, plus custom RAL colours. A MacAdams step <2, and standard high CRI of 90+, ensuring excellent light quality for any space and is backed by a 5-year warranty (extendable up to 10 years).

Components

Philips Fortimo LED Boards
 Integral Philips LED Driver (Flicker Free)
 Frosted Micro-Prismatic Diffuser
 Zephyr-Link Click Lock Gear Tray

Construction


Extruded Aluminium Housing
 Screwless CNC End Caps
 Supplied Pre-Built
 Mitred & Welded Joints Available
 Light-Leak Free Joining Technology

Finish


White, Black, Natural Anodised Standard (Other RAL avail)



Polar Diagram

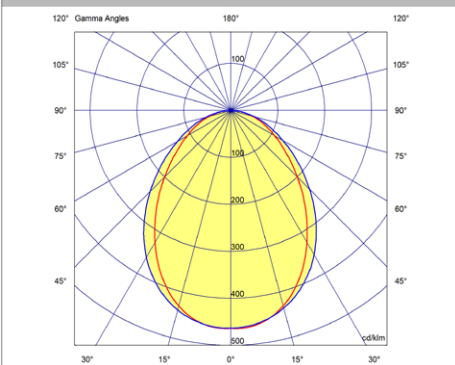

Nominal Dimensions

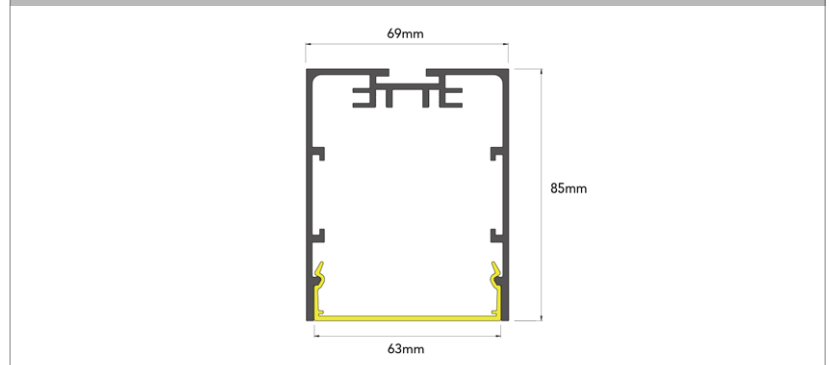

Lifetime Data & Other

L80/B10 lumen maintenance of >90,250hrs (Reported)
 Ambient tested operating temperature of 25°C
 ERAC Certified, #284
 Class I Luminaire
 IP20 from below / IP20 from above

Warranty

5-Year Standard
 7-Year Extended
 10-Year Extended

LIGHTPLANE 70 SM MP

TECHNICAL INFORMATION

Technical Electrical

220-240v Input Voltage

50-60hz Input Frequency

PF (Power Factor) >0.97 (lowest)

200mA - 1000mA operating current

Min / Max dim level 1% to 100%

Colourmetric Data (4000K)

3983K (4000K ANSI) Colour temperature on initial

90+ Colour rendering on initial

MacAdams 1.8

R9 value 68

COI: Yes (2.96)

Optical Parameters

92° Beam



Cat No.	Output	Wattage	Efficacy	CCT (K)	CRI	Size
LPL70.SM.10WM.FO.MP.930.BK	1204lm/m	10W/m	120lm/w	3000K	90+	69 x 85
LPL70.SM.10WM.FO.MP.940.BK	1238lm/m	10W/m	123lm/w	4000K	90+	69 x 85
LPL70.SM.14WM.FO.MP.930.BK	1742lm/m	14W/m	124lm/w	3000K	90+	69 x 85
LPL70.SM.14WM.FO.MP.940.BK	1829lm/m	14W/m	130lm/w	4000K	90+	69 x 85
LPL70.SM.20WM.FO.MP.930.BK	2460lm/m	20W/m	123lm/w	3000K	90+	69 x 85
LPL70.SM.20WM.FO.MP.940.BK	2632lm/m	20W/m	131lm/w	4000K	90+	69 x 85
LPL70.SM.24WM.FO.MP.930.BK	2928lm/m	24W/m	122lm/w	3000K	90+	69 x 85
LPL70.SM.24WM.FO.MP.940.BK	3134lm/m	24W/m	130lm/w	4000K	90+	69 x 85

Control Gear Options

Fixed Output LPL.70.SM.10WM.**FO**.MP.930.BK

DALI LPL.70.SM.10WM.**DA**.MP.930.BK

Casambi LPL.70.SM.10WM.**CA**.MP.930.BK

Colour Finish Options

Black LPL.70.SM.10WM.FO.MP.930.**BK**

White LPL.70.SM.10WM.FO.MP.930.**WH**

Natural Anodised LPL.70.SM.10WM.FO.MP.930.**NA**

Custom LPL.70.SM.10WM.FO.MP.930.**CC**